

## Encoders

optical Encoder, digital outputs,  
3 channels, 1000 - 10000 lines per revolution

For combination with  
DC-Micromotors  
Brushless DC-Motors

### Series IER3-10000

	IER3	-1000	-2000	-4000	-1024	-2048	-4096	-1700	-3400	-6800	-2500	-5000	-10000	
Lines per revolution	<i>N</i>	1000	2000	4000	1024	2048	4096	1700	3400	6800	2500	5000	10000	
Frequency range, up to <sup>1)</sup>	<i>f</i>	250	500	1000	250	500	1000	250	500	1000	250	500	1000	kHz
Signal output, square wave		2+1 Index												
Supply voltage	<i>U<sub>DD</sub></i>	4,5 ... 5,5												
Current consumption <sup>2)</sup>	<i>I<sub>DD</sub></i>	typ. 27, max. 50												
Output current, max. <sup>3)</sup>	<i>I<sub>OUT</sub></i>	4												
Index Pulse width	<i>P<sub>0</sub></i>	90 ± 15												
Phase shift, channel A to B	<i>Φ</i>	90 ± 20												
Signal rise/fall time (C <sub>LOAD</sub> = 50 pF), typ.	<i>tr/tf</i>	< 0,1 / < 0,1												
Inertia of code disc, typ.	<i>J</i>	0,14												
Operating temperature range <sup>4)</sup>		- 20 ... + 85												
Accuracy, typ.		0,3			0,3			0,2			0,1			°m
Repeatability, typ.		0,05												
Hysteresis		< 0,05												
Edge spacing, min.		125												
Mass, typ.		13,5												

<sup>1)</sup> Velocity (min<sup>-1</sup>) = *f* (Hz) x 60/*N*

<sup>2)</sup> *U<sub>DD</sub>* = 5V: with unloaded outputs

<sup>3)</sup> *U<sub>DD</sub>* = 5V: low logic level < 0,4V, high logic level > 2,4V: TTL compatible

<sup>4)</sup> Operating temperature range - 40 ...+ 85 °C available on request

Product combination	IER3	-1000	-2000	-4000	-1024	-2048	-4096	-1700	-3400	-6800	-2500	-5000	-10000	
Series		Motor, <L1 [mm]		Motor, <L1 [mm]		Motor, <L1 [mm]		Motor, <L1 [mm]		Motor, <L1 [mm]		Motor, <L1 [mm]		Drawing
2214 ... BXT H		26,8		26,8		-		-		-		-		A
3216 ... BXT H		28,7		28,7		-		-		-		-		A
4221 ... BXT H		34,0		34,0		-		-		-		-		A
2264 ... BP4		79,1		79,1		-		-		-		-		B
3274 ... BP4		90,8		90,8		-		-		-		-		B
2237 ... CXR		52,5		52,5		-		-		-		-		B
2642 ... CXR		60,5		60,5		-		-		-		-		C
2657 ... CXR		75,5		75,5		-		-		-		-		C
2342 ... CR		60,5		60,5		-		-		-		-		C
2642 ... CR		60,5		60,5		-		-		-		-		C
2657 ... CR		75,5		75,5		-		-		-		-		C
2668 ... CR		86,5		86,5		-		-		-		-		C
3242 ... CR		60,5		60,5		-		-		-		-		C
3257 ... CR		75,5		75,5		-		-		-		-		C
3272 ... CR		90,5		90,5		-		-		-		-		C
3863 ... CR - 2016		82,6		82,6		-		-		-		-		D
3890 ... CR - 2016		108,6		108,6		-		-		-		-		D
2232 ... BX4		50,2		50,2		50,2		-		-		-		E
2250 ... BX4		68,2		68,2		68,2		-		-		-		E
3242 ... BX4		60,0		60,0		60,0		60,0		60,0		60,0		F
3268 ... BX4		86,0		86,0		86,0		86,0		86,0		86,0		F

**Note:** Please note that the available pulse numbers depend on the attachment system and therefore not all motors are available with all pulse numbers. The available pulse numbers for each motor are listed under the Combinatorics section.

### Characteristics

These incremental encoders with 3 output channels, in combination with the FAULHABER Motors, are used for the indication and control of both shaft velocity and direction of rotation as well as for positioning.

With a reflective code disc two square wave signals with 90° phase shift and one index impulse per motor revolution are generated.

The optical measurement principle allows high accuracy and repeatability for positioning applications. The high resolution encoder provides up to 4096 lines per revolution. In combination with the brushless DC-Servomotors BX4 with diameter 22 mm up to 6800 lines per revolution are available.


In combination with the brushless DC-Servomotors BX4 with diameter 32 mm up to 10000 lines per revolution are available.

The encoder is connected via a ribbon cable. The pins are compatible to the FAULHABER Encoder IE3.


To view our large range of accessory parts, please refer to the "Accessories" chapter.

**Circuit diagram / Output signals**

**Output circuit**






**Output signals**  
with clockwise rotation as seen from the shaft end

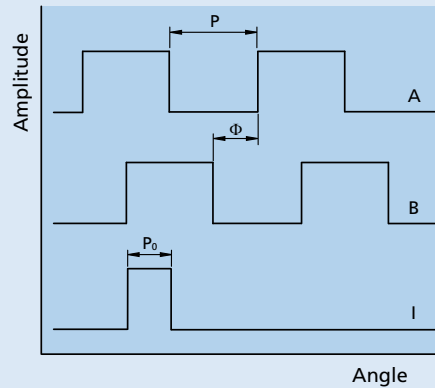

**Connector information / Variants**

Example product designation: 2232S024BX4 IER3-6800 3592

Option	Type	Description
3807	Connector 	for combination with DC-Motors series CR, CXR and with Brushless DC-Motor series BP4 and BXT H. Connector variants AWG 28 / PVC ribbon cable with connector MOLEX Picoblade 51021-0600, recommended mating connector 53047-0610.
3592	Connector 	for combination with Brushless DC-Motors series BX4. Connector variants AWG 28 / PVC ribbon cable with connector MOLEX Picoblade 51021-0600, recommended mating connector 53047-0610.



**Connection Encoder**

**No. Function**

- 1 N.C.
- 2 Channel I
- 3 GND
- 4 U<sub>DD</sub>
- 5 Channel B
- 6 Channel A





**Standard cable**  
PVC-ribbon cable, 6-AWG 28, 1,27 mm


**Caution:**  
Incorrect lead connection will damage the motor electronics!

**Dimensional drawing A**


Example of combination with 2214...BXTH

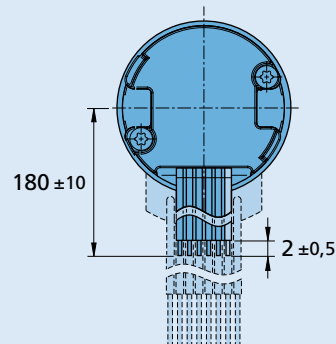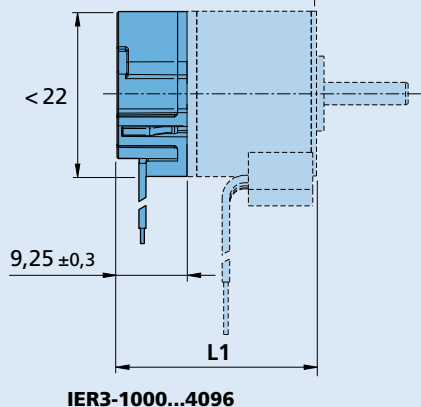


**Dimensional drawing B**

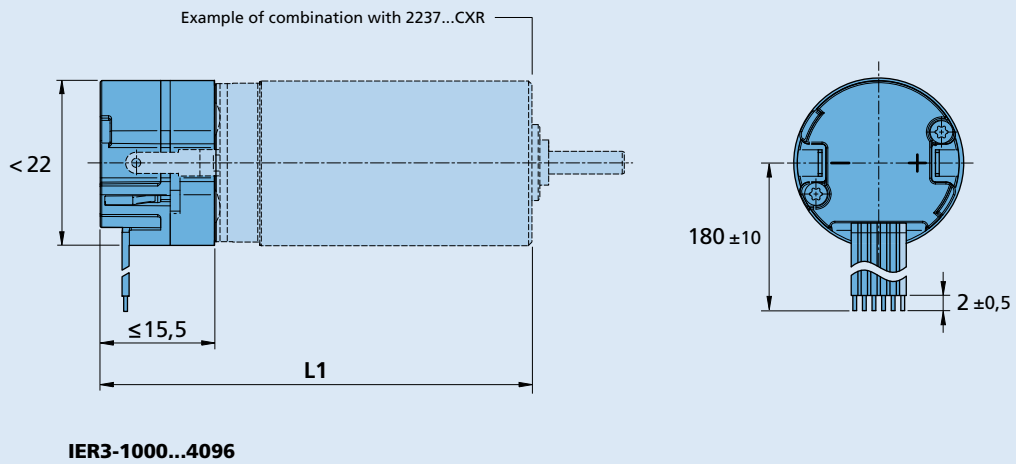


**Dimensional drawing C**

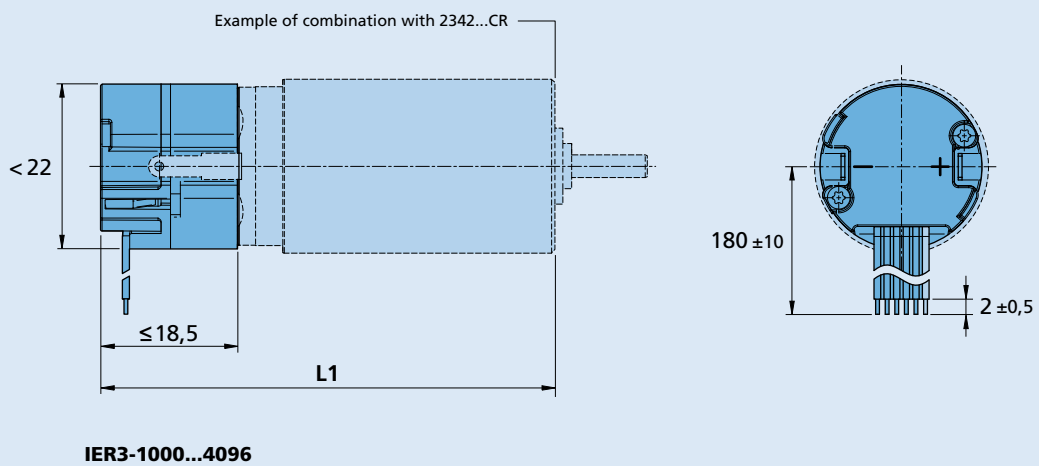


**Dimensional drawing D**

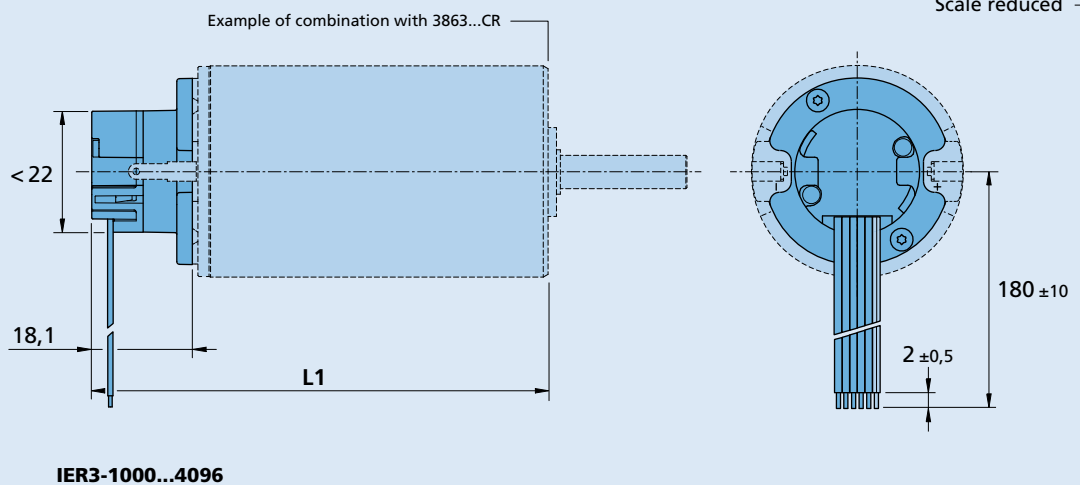

**Dimensional drawing E**

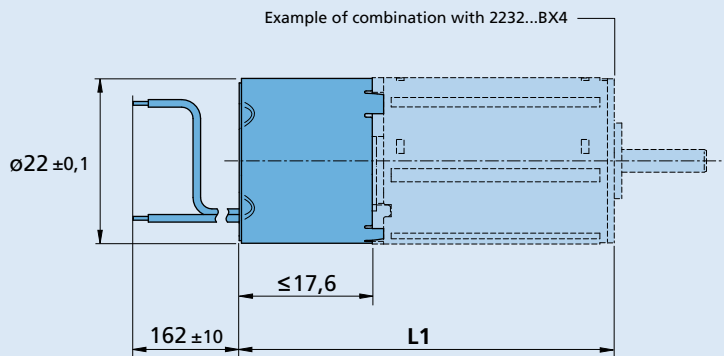


**Connection Encoder**




**Connection Motor**

**IER3-1000...6800**

**Dimensional drawing F**

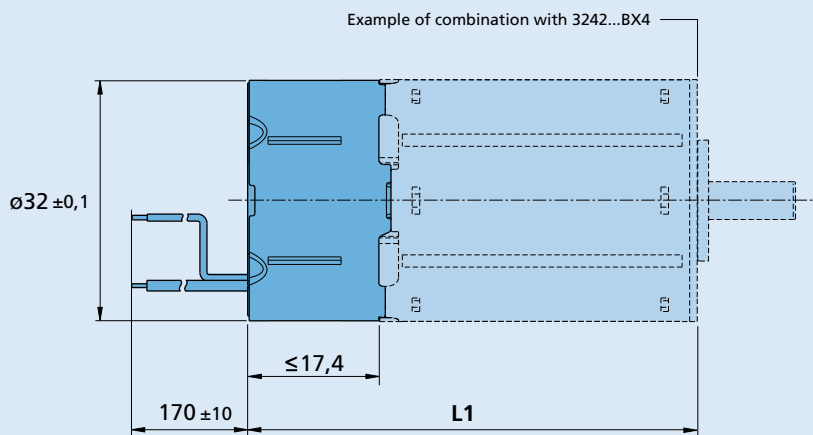

**Connection Encoder**

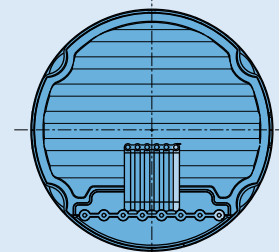

**Connection Motor**

**IER3-1000...10000**