




Brushless DC-Motor	
1.	Rear cover
2.	Lead wires
3.	Electronics
4.	Housing
5.	Coil
6.	Ball bearing
7.	Washer
8.	Spring
9.	Magnet
10.	External rotor
11.	Shaft
12.	Front cover

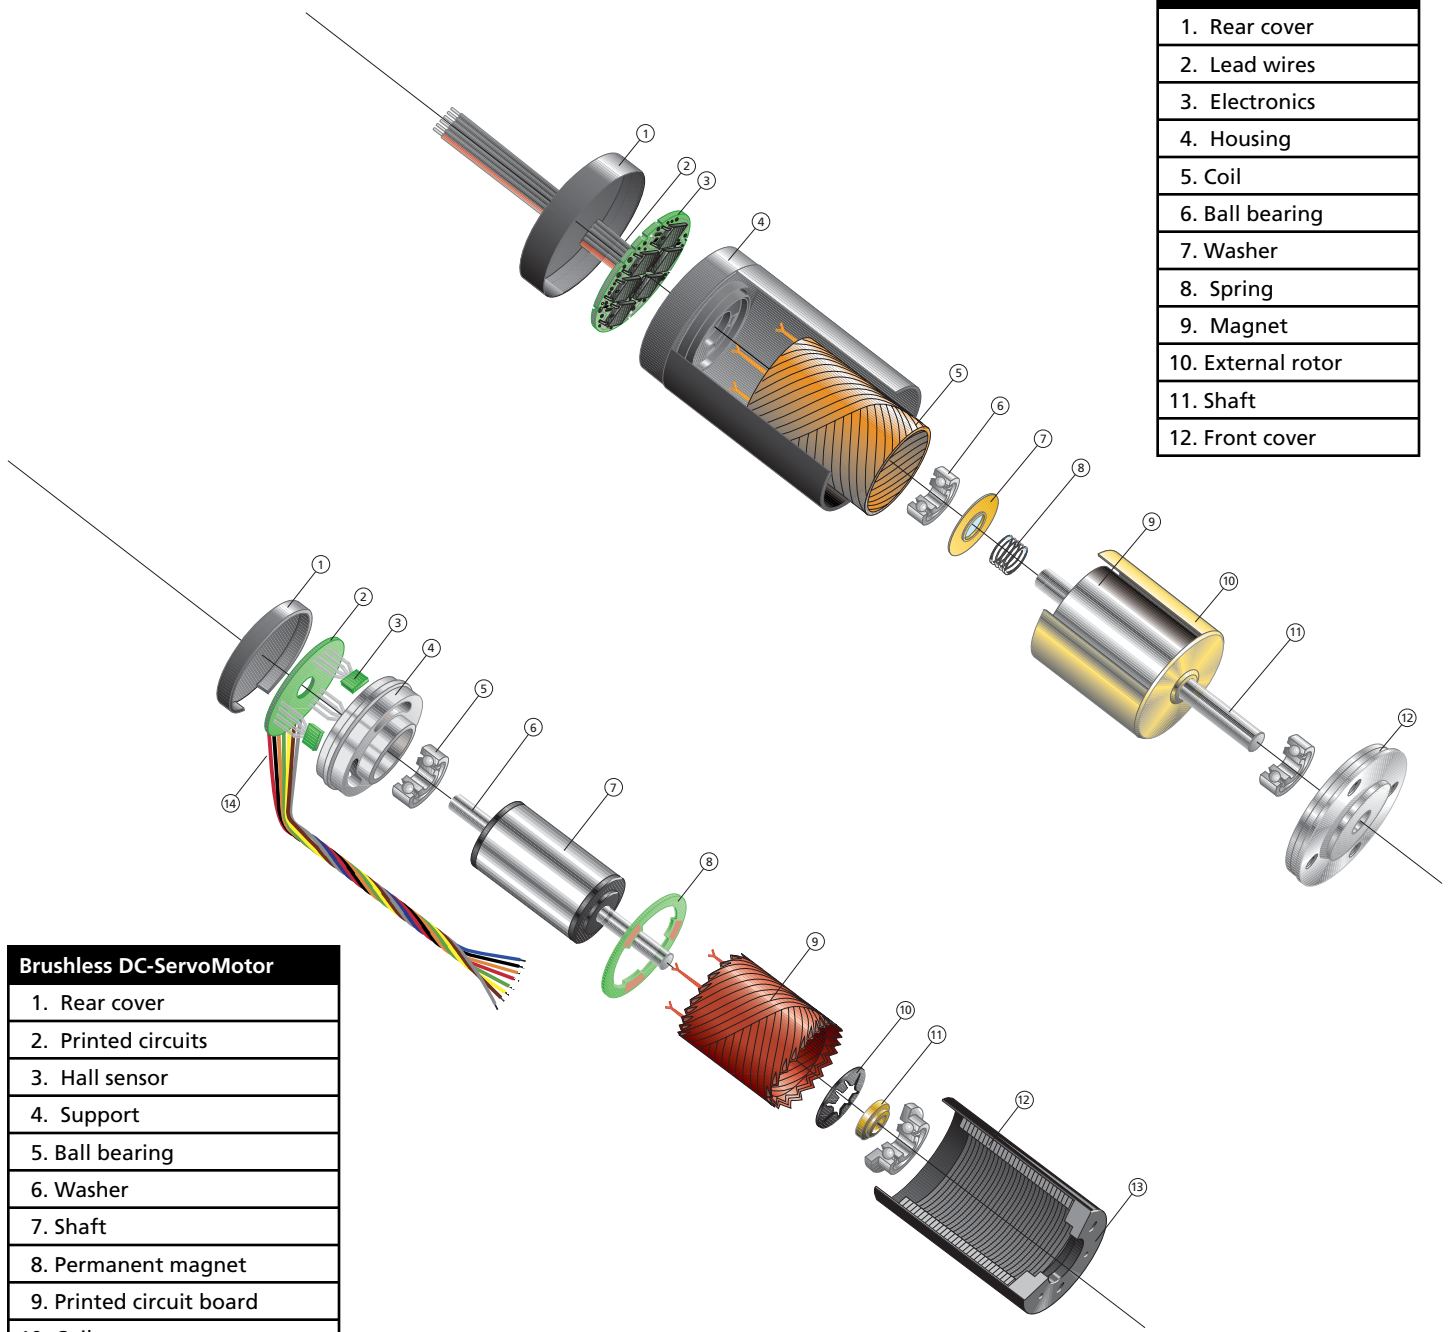

Brushless DC-ServoMotor	
1.	Rear cover
2.	Printed circuits
3.	Hall sensor
4.	Support
5.	Ball bearing
6.	Washer
7.	Shaft
8.	Permanent magnet
9.	Printed circuit board
10.	Coil
11.	Spring Washer
12.	Spacer
13.	Laminated stack
14.	Housing
15.	Wires

MicroMo Electronics, Inc.
 14881 Evergreen Ave Clearwater, FL 33762-3008
 Tel: (727) 572-0131 | Toll Free: (800) 807-9166 | Fax: (727) 572-7763
 e-mail: info@micromo.com Web: www.micromo.com
 ©2007 MicroMo Electronics, Inc.



Ordering Information

Brushless Motors

Row	1	2	3	4	5	6
Example 1	16	28	S	012	B	...
Example 2	35	64	K	024	B	Special order numbers: (where applicable)
					B = Standard brushless	
					BRE = 2 wire brushless BC = Brushless with integrated motor controller	
					Motors = Nominal Voltage	
					Output Shaft:	
					K = shaft: 3056, 3153, 3564	
					S = shaft: 1935, 2444	
					T = shaft: 1525, 1628	
					U = shaft: 1525, 2036	
					Motor Length	
					Motor Diameter	

MicroMo Electronics, Inc.

14881 Evergreen Ave Clearwater, FL 33762-3008

Tel: (727) 572-0131 | Toll Free: (800) 807-9166 | Fax: (727) 572-7763

e-mail: info@micromo.com Web: www.micromo.com

©2007 MicroMo Electronics, Inc.